



Onyx

SPOTLIGHT SERIES

The possibilities are endless with the Onyx Spotlight Series — accent lighting, illumination of walls or striking beam washes, this spotlight range has you covered. Designed with high grade anodised aluminium, a faceted reflector and a 350° tilting head, the Onyx Spotlight is a stylish addition to any design application.

- Inset adjustable knuckle can be rotated up to 90° for a perfect fixed down wall light
- Available in single, double and triple configurations
- Head can be rotated up to 350° for complete flexibility
- Available in a UV textured black, white or anodised aluminium finish



Series of Luminaires

Primarily used as accent light, our series extends from a single spotlight for subtle applications to a triple spotlight ideal for larger applications.



Adjustability

Our range of spotlights bring lighting flexibility to any architectural environment — in positioning and alignment.



Wall or Ceiling Mounted

The Onyx Spotlight Series can be ceiling or wall mounted for different applications.



Driver (DALI drivers can be configured via Product Toolbox)	F	Beam	E	CCT	D	Finish	C	Power	B	Product Family	A	F	E	D	C	B	A
Phase Cut Dimmable Driver included	-	Medium	M	3000K	30	Textured Black Textured White Anodised Aluminium	TB TW AA	0007 7W 0014 14W 0021 21W	ONSP Onyx Spotlight	ONSP	-	Driver	M	30	TB	0007	ONSP

Example: **ONSP0007.TB30.M**
Refer to data sheet for available configurations.
Visit Product Toolbox at unios.com/onyxspot to configure compatible Osram/Tridonic DALI drivers.



Top: Residential application
 Left: Each head can be tilted up to 90°
 Above: Independently adjustable heads



Onyx One
Single adjustable spotlight perfectly suited for accent lighting.
Measurements (mm)
Absolute Luminous Flux
7W (700mA) 560lm
Beam
35° (M)



Onyx Two
Double adjustable spotlight often utilised on exterior walls.
Measurements (mm)
Absolute Luminous Flux
2x 7W (700mA) 2x 560lm
Beam
35° (M)




Onyx Three
Triple adjustable spotlight ideal for alfrescos and ceilings.
Measurements (mm)
Absolute Luminous Flux
3x 7W (700mA) 3x 560lm
Beam
35° (M)

Finishes
UV Textured Black
UV Textured White
Anodised Aluminium
General Specifications
Material Powder Coated Aluminium
IP 65
Warranty 3 Years

LED
Colour Temp 3000K
CRI 80+
Efficacy Up to 58lm/w
Colour Deviation SDCM≤3
Lifetime >63,500h L70

Driver
Power Factor >0.90
240V Built-in PC Dimmable Driver DALI Driver must be remote.
Dimming LED Phase-Cut Dim (PC) DALI Dim Optional

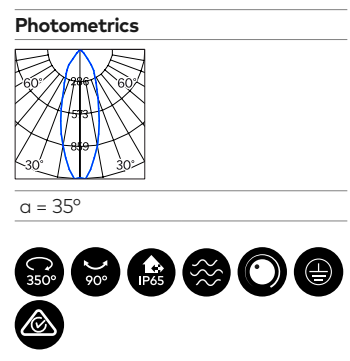

A	ONSP	0007	TB	30	M	-	Driver (DALI drivers can be configured via Product Toolbox)
B	0007	0014	0021	0007	0014	0021	Phase Cut Dimmable Driver included
C	TB	TW	AA	Textured Black	Textured White	Anodised Aluminium	
D	30	3000K					
E	M						
F	-						
Power	7W	14W	21W				
Product Family	ONSP	OnyxSpotlight					

Example: **ONSP0007.TB30.M**
 Refer to data sheet for available configurations.
 Visit Product Toolbox at unios.com/onyxspot to
 configure compatible Osram/Tridonic DALI drivers.