




# Titanium

SLOTTER SERIES

Available in up to three low-glare, adjustable gimbal downlights, this slotter light series will deliver both flexibility and performance in any application. Each gimbal downlight can be positioned individually, providing complete control in lighting a space. Its refined recessed design is available in a textured black finish or a contrasting white trim, black baffle design.

- Available with a single, double or triple gimbal
- An extension of the Titanium range of luminaires
- Rotatable up to 350° and tiltable up to 30°
- Available with a textured black trim and baffle or a textured white trim and black baffle design.









Single	Double	Triple
Measurements (mm)		
 100 (100x90)	 185 (175x90)	 270 (260x90)

Absolute Luminous Flux		
10W (270mA) 750lm (at 3000K) 850lm (at 4000K)	2x 10W (540mA) 2x 750lm (at 3000K) 2x 850lm (at 4000K)	3x 10W (750mA) 3x 750lm (at 3000K) 3x 850lm (at 4000K)

Beam		
24° (N)   38° (M)   60° (W)   83° (F)		

**Titanium Series**  
A comprehensive family of luminaires for every application


			
Ceiling Recessed P26 <i>Titanium Downlight</i>	Ceiling Recessed P40 <i>Titanium Semi-Recessed</i>	Ceiling Recessed P44 <i>Titanium Starlight</i>	Ceiling Surface P104 <i>Titanium Surface Mount / Pendant</i>


Finishes
Textured Black 
Textured White/Black 

General Specifications
<b>Material</b>   Powder Coated Aluminium
<b>IP</b>   20
<b>UGR (Unified Glare Rating)</b>   <16
<b>Warranty</b>   5 Years

LED
<b>Colour Temp</b>   2700K, 3000K, 4000K
<b>CRI</b>   92+
<b>Efficacy</b>   Up to 77lm/w
<b>Colour Deviation</b>   SDCM≤3
<b>Lifetime</b>   >100,000h L70

Driver
<b>Power Factor</b>   >0.90
240V Remote PC Dimmable Driver
<b>Dimming</b>   LED Phase-Cut Dim (PC) DALI Dim Optional

Accessory

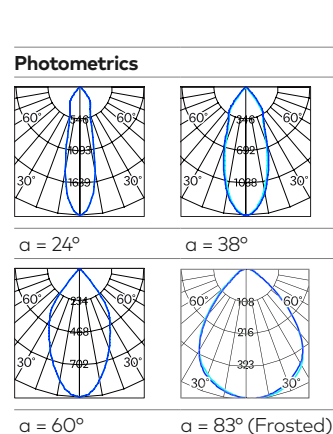FLO03 Frosted Lens (83°)



30° 350° 90+ CRI <16 COI



A	TISL	0010	TB	30	M	-	Driver
B	0010	0020	0030				Power
C	TB	TW					Finish
D	27	30	40				CCT
E	N	M	W	F			Beam
F	-	-	-	-	-	-	Driver (DALI drivers can be configured via Product Toolbox) Phase Cut Dimmable Driver included

Example: **TISL0010.TB30.M**  
Refer to data sheet for available configurations.  
Visit Product Toolbox at [unios.com/titaniumslotter](http://unios.com/titaniumslotter) to configure compatible Osram/Tridonic DALI drivers.