



Axis

SURFACE MOUNTED DOWNLIGHT

Designed to revolve around any application, the Axis is more than just a surface mounted luminaire. An innovative rotating lens head has been developed from the ground up to provide unparalleled flexibility. Minimalist in design and precise in lighting application, the Axis is a perfect fit for residential and commercial applications.

- Unique adjustable lens head that can be rotated up to 90°
- The latest generation of LED technology for class-leading performance and longevity
- Available with 97+ technology for applications requiring superior colour accuracy

97+ Technology

Every architectural finish, material and detail comes to life with 97+ technology. All Axis Surface Mounted Downlights are available with a CRI 97+ option to bring new levels of colour rendering to design applications.



Rotating Lens Head

Uniquely designed to give you maximum flexibility, the lens head rotates into an array of positions.



Surface Mounted or Track

Our unique Axis Series is available in both track and surface mount configurations for various design applications.



Phase Cut Dimming

Dims perfectly with Phase Cut systems offering 5-100% Dimming. Dimming works best with LED Dimmers.



A	B	C	D	E	F	Driver
AXIS	0007	TB	30	W	-	Standard Dimmable Driver included
Product Family	Power	Finish	CCT	Beam		
Axis Surface Mounted Downlight	0007 7W	Textured Black	2700K	Pencil		
Axis 97+ Surface Mounted Downlight	0015 15W	Textured White	3000K	Narrow		
	0026 26W		4000K	Medium		
				Wide		


Example: **AXIS0007.TB30.W**
Refer to data sheet for available configurations.
Visit Product Toolbox at unios.com/axis to configure compatible Osram/Tridonic DALI drivers.



Top: Duotone Cafe
 Left: Carousel Meats
 Above: Residential Application



Small (60mm)
 Measurements (mm)




Absolute Luminous Flux
7W (200mA)
 565lm (at 3000K)
 605lm (at 4000K)

Beam
 15° (P) | 30° (N) | 60° (W)



Medium (80mm)
 Measurements (mm)




Absolute Luminous Flux
15W (400mA)
 1190lm (at 3000K)
 1270lm (at 4000K)

Beam
 15° (P) | 30° (N) | 60° (W)



Large (110mm)
 Measurements (mm)



Absolute Luminous Flux
26W (700mA)
 2545lm (at 3000K)
 2770lm (at 4000K)

Beam
 25° (N) | 40° (M) | 60° (W)

Finishes

- UV Textured Black
- UV Textured White

General Specifications

Material | Powder Coated Aluminium
IP | 65
UGR (Unified Glare Rating) | <16
Warranty | 5 Years


LED

Colour Temp | 2700K, 3000K, 4000K
CRI | 80+, 97+
Efficiency | Up to 91lm/w
Colour Deviation | SDCM≤3
CRI97: SDCM≤2
Lifetime | >54,000h L70

Driver

Power Factor | >0.90
240V Built-in PC Dimmable Driver
 DALI Driver must be remote.
Dimming | LED Phase-Cut Dim (PC)
 DALI Dim Optional

Photometrics

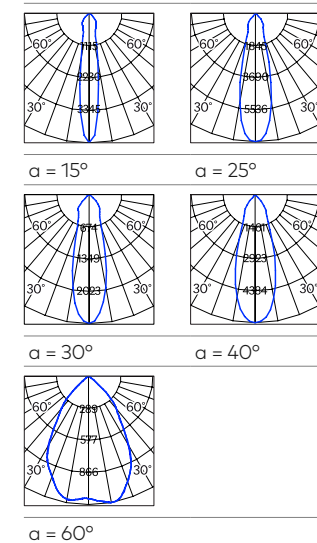

Axis Series

For a cohesive design, utilise other products in the Axis product range.



Page: 192
 Axis Track Light

A	AXIS	0007	TB	30	W	Driver	
F						Standard Dimmable Driver included	
E							
D							
C							
B							
A	Product Family	AXIS	Axis Surface Mounted Downlight	AS97	Axis 97+ Surface Mounted Downlight		
B	Power	0007	7W	0015	15W	0026	26W
C	Finish	TB	Textured Black	TW	Textured White		
D	CCT	27	2700K	30	3000K	40	4000K
E	Beam	P	Pencil	N	Narrow	M	Medium
F							

Example: **AXIS0007.TB30.W**
 Refer to data sheet for available configurations.
 Visit Product Toolbox at unios.com/axis to configure compatible Osram/Tridonic DALI drivers.