



Kobe

TRACK LIGHT SERIES

Distinguished by a striking contrasting design, the Kobe Track Light Series will add an elegant touch to any design application. This track light series is available in four meticulously selected finishes and an array of customisable configurations to complement any design application.

- Available with textured black or white finish with black or gold inner trim
- Class-leading longevity with new generation LED chips, allowing for a lifetime of over 100,000hr (L70)
- Highly customisable track spot system with different beams angles and lenses

97+ Technology

Every architectural finish, material and detail comes to life with 97+ technology. All Kobe Track Lights are available with a CRI 97+ option to bring new levels of colour rendering to design applications.

Driver (DALI drivers can be configured via Product Toolbox)
Driver code not required - driver is integrated into luminaire

F -

Beam
Pencil
Medium
Wide

ECT
2700K
3000K
4000K

Diameter
27
30
40

Finish
BB Textured Black
WB Textured White
BG Black/Gold Trim
WG White/Gold Trim

Circuit/Power
1C 8W
1C 15W
3C 8W
3C 15W
3C 26W
3C 35W

Product Family
Kobe Track Light
Kobe 97+ Track
Light

A
KOBETRACK
KOBELIGHT

F -

E M

D 30

C BB

B 1008

A KOBETRACK

Example: **KOBETRACK.BB30.M**

Refer to data sheet for available configurations.
Visit Product Toolbox at unios.com/kobe
to configure compatible Osram/Tridonic DALI drivers.



8W	15W	26W	35W
Measurements (mm)			
Absolute Luminous Flux			
3000K 4000K 8W (200mA) 735lm 750lm	3000K 4000K 15W (380mA) 1310lm 1490lm	3000K 4000K 26W (670mA) 2330lm 2440lm	3000K 4000K 35W (900mA) 3355lm 3460lm
Beam			
15° (P) 36° (M) 60° (W)			

Finishes

Textured Black	
White/Black Trim	
Black/Gold Trim	
White/Gold Trim	

General Specifications



Material | Powder Coated Aluminium
IP | 20
UGR (Unified Glare Rating) | <13
Warranty | 5 Years
Track Mount | Single (1C) and three (3C) circuit track adaptor available

LED

Colour Temp | 2700K, 3000K, 4000K
CRI | 92+, 97+
Efficacy | Up to 93lm/w
Colour Deviation | SDCM≤3
 CR!97: SDCM≤2
Lifetime | >100,000h L70

Driver

Power Factor | >0.90
240V Built-in PC Dimmable Driver
 DALI Driver must be used in conjunction with DALI Gearbox
Dimming | LED Phase-Cut Dim (PC) DALI Dim Optional

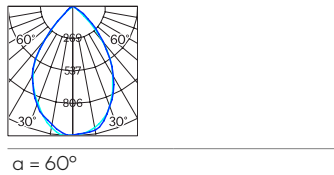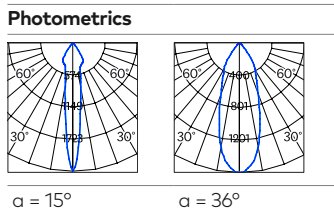


Accessories

Code (8/15W): HL001
 Code (26/35W): HL002
 Honeycomb Lens

Optional DALI Gearbox

See Page 206 for details

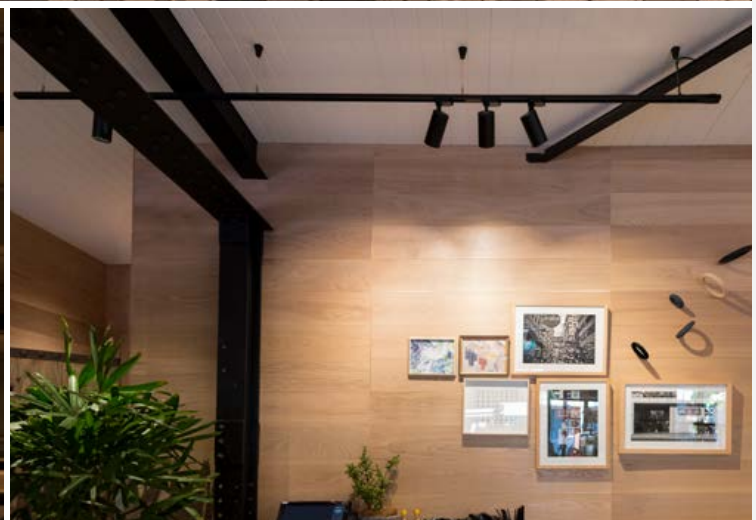

Top & Above: Rice Baby
 Left: Two Oceans Tackle



A	B	C	D	E	F
KOBE	1008	BB	30	M	-
Example: KOBE1008.BB30.M					
Refer to data sheet for available configurations. Visit Product Toolbox at unios.com/kobe to configure compatible Osram/Tridonic DALI drivers.					
Product Family	Circuit/Power	Finish	D CCT	Beam	Driver (DALI drivers can be configured via Product Toolbox)
KOBE Track Light Kobe 97+ Track Light	1C 8W 1C 15W 3C 8W 3C 15W 3C 26W 3C 35W	BB Textured Black WB Textured White BG Black/Gold Trim WG White/Gold Trim	27 2700K 30 3000K 40 4000K	P Pencil M Medium W Wide	- Driver code not required - driver is integrated into luminaire