




Onyx

WALL LIGHT

The Onyx Wall Light is a modern wall light with a difference. With a faceted reflector and three finish options, it provides a unique point of difference to be a feature on any wall or pillar.

- Clear lens for maximum light output for pillar lighting
- Minimalist cylindrical design with an up/down feature
- Uniquely designed glass creates a flush body for complete symmetry

Measurements (mm)




Absolute Luminous Flux

8W (350mA)
730lm (at 3000K)

Beam
40° (M)

Photometrics



$\alpha = 40^\circ$



Finishes

- UV Textured Black
- UV Textured White
- Anodised Aluminium

General Specifications


- Material | Powder Coated Aluminium
- IP | 65
- Warranty | 3 Years

LED

- Colour Temp | 3000K
- CRI | 80+
- Efficacy | Up to 89lm/w
- Colour Deviation | SDCM \leq 3
- Lifetime | >63,500h L70

Driver

- Power Factor | >0.90
- 240V Built-in PC Dimmable Driver
- DALI Driver must be remote.
- Dimming | LED Phase-Cut Dim (PC)
- DALI Dim Optional

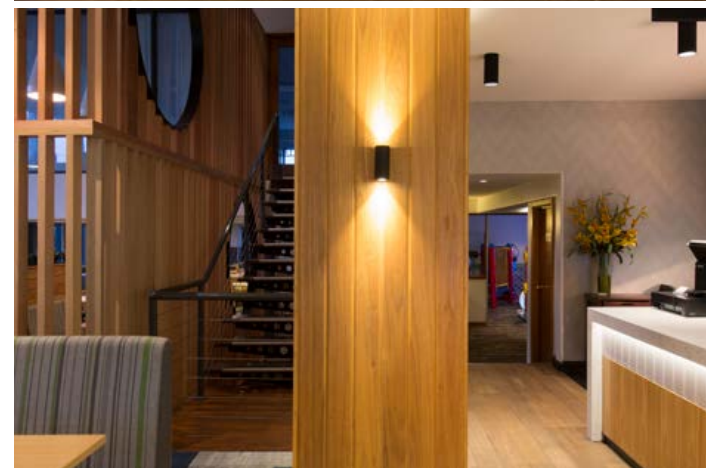

Top, Above & Right:
Anglers Tavern (Designed by TMDG)



A	ONYX	B	0008	C	TB	D	30	E	M	F	-	Driver (DALI drivers can be configured via Product Toolbox)
A	Product Family	B	Power	C	Finish	D	CCT	E	Beam	F	-	Phase Cut Dimmable Driver included
A	ONYX Onyx Wall Light	B	0008 8W	C	TB TW AA	D	3000K	E	Medium	F	-	

Example: **ONYX0008.TB30.M**
Refer to data sheet for available configurations.
Visit Product Toolbox at [unios.com/onyxwall](https://www.unios.com/onyxwall) to configure compatible Osram/Tridonic DALI drivers.